

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number  
**WO 2004/018871 A1**

(51) International Patent Classification<sup>7</sup>: **F03C 2/30**

(21) International Application Number:  
PCT/JP2003/010248

(22) International Filing Date: 12 August 2003 (12.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002-240987 21 August 2002 (21.08.2002) JP

(71) Applicant (for all designated States except US): **EBARA CORPORATION** [JP/JP]; 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHINODA, Masao** [JP/JP]; c/o Ebara Research Co., Ltd., 2-1, Honfujisawa

4-chome, Fujisawa-shi, Kanagawa 251-8502 (JP). **YA-MASHINA, Chishiro** [JP/JP]; c/o Ebara Research Co., Ltd., 2-1, Honfujisawa 4-chome, Fujisawa-shi, Kanagawa 251-8502 (JP). **MIYAKAWA, Shimpei** [JP/JP]; c/o Ebara Research Co., Ltd., 2-1, Honfujisawa 4-chome, Fujisawa-shi, Kanagawa 251-8502 (JP).

(74) Agents: **WATANABE, Isamu** et al.; GOWA Nishi-Shinjuku 4F, 5-8, Nishi-Shinjuku 7-chome, Shinjuku-ku, Tokyo 160-0023 (JP).

(81) Designated State (national): US.


(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **VANE-TYPE HYDRAULIC MOTOR**

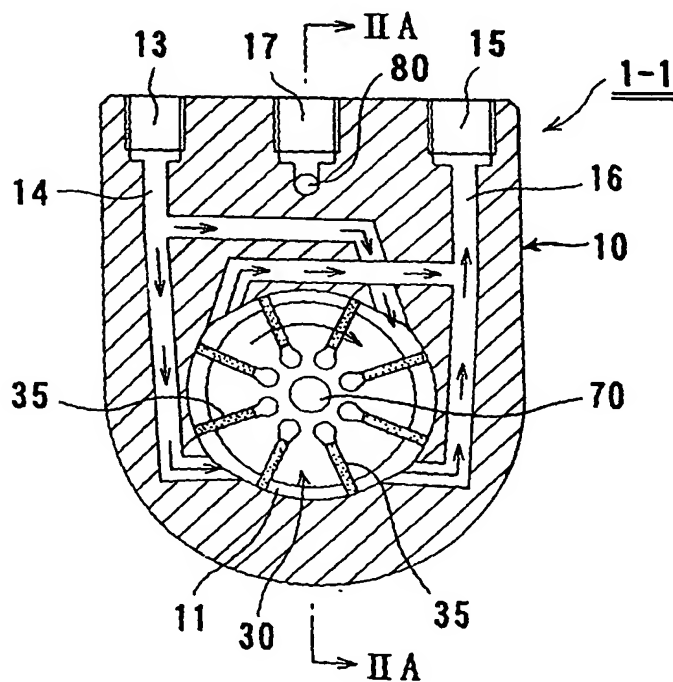

(57) Abstract: A vane-type hydraulic motor includes a rotor (30) having a main shaft (70) and a plurality of vanes (35), a cam casing (10) having a chamber (11) for rotatably housing the rotor (30), a first port (13) and a second port (15) for supplying a working fluid into the chamber (11) and discharging the working fluid from the chamber (11). A bypass path (80) is provided for allowing the working fluid to flow from bearing portions (51, 61) supporting the main shaft (70). A drain port (17) is provided for discharging the working fluid to the exterior.